



Magnetic Pulleys

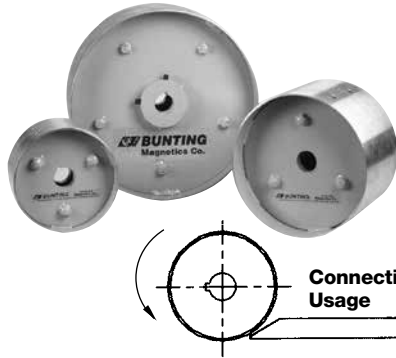

Connecting Bracket Usage

Flat Face Standard
Crowned Face Optional

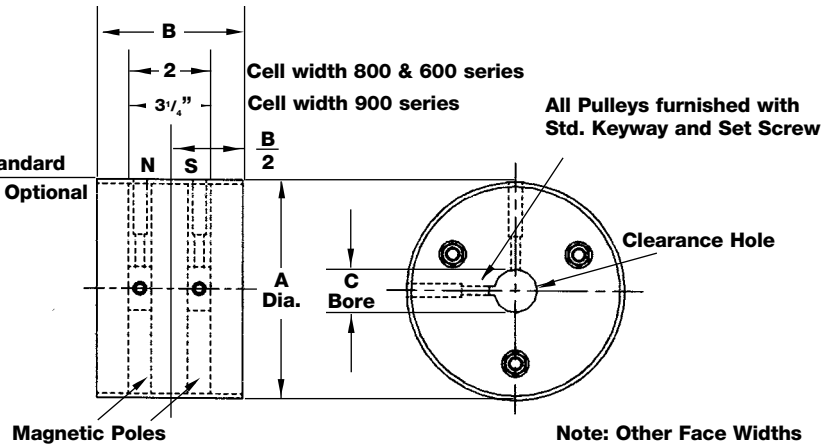

Note: Other Face Widths Available Upon Request

800 SERIES SINGLE CELL PULLEYS															
To Be Used With 800 Series Rails & 4929 Channel Magnet															
MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C
BM804P-04	4	4	1	BM804P-06	4	6	1	BM804P-08	4	8	1	BM804P-10	4	10	1
BM806P-04	6	4	1 3/16	BM806P-06	6	6	1 3/16	BM806P-08	6	8	1 3/16	BM806P-10	6	10	1 3/16
BM808P-04	8	4	1 3/16	BM808P-06	8	6	1 3/16	BM808P-08	8	8	1 3/16	BM808P-10	8	10	1 3/16
600 SERIES SINGLE CELL PULLEYS															
To Be Used With 600 Series Rails															
MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C
BM604P-04	4	4	1	BM604P-06	4	6	1	BM604P-08	4	8	1	BM606P-10	4	10	1
BM606P-04	6	4	1 3/16	BM606P-06	6	6	1 3/16	BM606P-08	6	8	1 3/16	BM608P-10	6	10	1 3/16
BM608P-04	8	4	1 3/16	BM608P-06	8	6	1 3/16	BM608P-08	8	8	1 3/16	BM604P-10	8	10	1 3/16
900 SERIES SINGLE CELL PULLEYS															
To Be Used With 900 Series Rails And 700 Series Plate Rails															
MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C	MODEL NUMBER	A DIA.	B F.W.	C
BM906P-04	6	4	1	BM906P-06	6	6	1	BM906P-08	6	8	1 3/16	BM906P-10	6	10	1
BM908P-04	8	4	1 3/16	BM908P-06	8	6	1 3/16	BM908P-08	8	8	1 3/16	BM908P-10	8	10	1 3/16
BM912P-04	12	4	1 3/16	BM912P-06	12	6	1 3/16	BM912P-08	12	8	1 3/16	BM912P-10	12	10	1 7/16
BM918P-04	18	4	1 7/16	BM918P-06	18	6	1 7/16	BM918P-08	18	8	1 7/16	BM918P-10	18	10	1 3/16